

FOLDER 10

- **Pemantauan
Kerja Projek**

MICROSOFT PROJECT



PEMANTAUAN KERJA PROJEK - *Menentukan Baseline*



Baseline

- **Pelaksanaan**
- **Pemantauan**
- **Kawalan**
- **Kelulusan**

MICROSOFT PROJECT

Hands-On



Menetapkan Baseline

File **Task** **Resource** **View** **Format**

Subproject Project Information Custom Fields Links Between Projects WBS Change Working Time Calculate Project **Set Baseline** Move Project Status Date: 28/5/11 Update Project Status Sync to Protected Actuals Visual Reports Reports Compare Projects Spelling Proofing

Insert Properties

Set Baseline

Take a snapshot of your schedule that includes information about tasks, resources, and assignments.

Compare multiple baselines to see how your project has changed over time.

? Press F1 for more help.

Task ID	Task Mod	WBS	Task Name	Duration	Start Date	Finish Date	Resources
1		1	Projek JKR - Membina 2 blok bangunan	130 days			
2		1.1	Projek Mula	0 days			
3		1.2	Preliminaries	130 days			
4		1.2.1	Performance Bond & Insurance	3 days			
5		1.2.2	Establish & Removal Site Office	127 days			
6		1.2.2.1	Establish Site Office	3 days			
7		1.2.2.2	Removal Site Office	2 days			
8		1.2.3	Maintenance of Site Office	126 days	6 Mar '11	29 Aug '11	6SS
9		1.2.4	Laporan Kemajuan	87 days	27 Mar '11	26 Jul '11	
15		1.3	Land Acquisition (Blok A & B)	0 days	1 Mar '11	1 Mar '11	2
16		1.4	Services Relocation (Blok B only)	0 days	1 Mar '11	1 Mar '11	15
17		1.5	Blok A	117 days	6 Mar '11	16 Aug '11	
18		1.5.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,15
19		1.5.2	Kerja Structure	37 days	1 May '11	21 Jun '11	18FS-15 day
20		1.5.3	Kerja Arkitek	50 days	8 Jun '11	16 Aug '11	19FS-10 day
21		1.5.4	Kerja M&E	35 days	22 Jun '11	9 Aug '11	19
22		1.6	Blok B	120 days	6 Mar '11	21 Aug '11	
23		1.6.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,16
24		1.6.2	Kerja Structure	35 days	24 Apr '11	12 Jun '11	23SS+35 day
25		1.6.3	Kerja Arkitek	60 days	30 May '11	21 Aug '11	24FS-10 day
26		1.6.4	Kerja M & E	50 days	13 Jun '11	21 Aug '11	24
27		1.7	Completion of Cable Laying By TN	0 days	28 Aug '11	28 Aug '11	21FS+5 days
28		1.8	Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27
29		1.9	Projek Siap	0 days	30 Aug '11	30 Aug '11	3,17,22,28

Menetapkan Baseline

Set Baseline

☒ Set baseline

Baseline

☐ Set interim plan

Copy: Scheduled Start/Finish

Into: Start1/Finish1

For:

☒ Entire project

☐ Selected tasks

Roll up baselines:

☐ To all summary tasks

☐ From subtasks into selected summary task(s)


Set as Default

Help OK Cancel

Task Mod	WBS	Task Name	Duration	Start	Finish	Predecessors
	1	Projek JKR - Membina 2 blok				
	1.1	Projek Mula				
	1.2	Preliminaries				
	1.2.1	Performance Bond				
	1.2.2	Establish & Removal				
	1.2.2.1	Establish Site				
	1.2.2.2	Removal Site				
	1.2.3	Maintenance of Site				
	1.2.4	Laporan Kemajuan				
	1.3	Land Acquisition (Block)				
	1.4	Services Relocation (Block)				
	1.5	Blok A				
	1.5.1	Kerja Tanah				
	1.5.2	Kerja Structure				
	1.5.3	Kerja Arkitek				
	1.5.4	Kerja M&E				
	1.6	Blok B				
	1.6.1	Kerja Tanah				
	1.6.2	Kerja Structure	35 days	24 Apr '11	12 Jun '11	23SS+35 day
	1.6.3	Kerja Arkitek	60 days	30 May '11	21 Aug '11	24FS-10 day
	1.6.4	Kerja M & E	50 days	13 Jun '11	21 Aug '11	24
	1.7	Completion of Cable Laying By TN	0 days	28 Aug '11	28 Aug '11	21FS+5 days
	1.8	Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27

Menetapkan Baseline

	i	Task Mod	WBS	Task Name	Duration	Start	Finish	Predecessors
1			1	Projek JKR - Membina 2 blok bangunan	130 days	1 Mar '11	30 Aug '11	
2			1.1	Projek Mula	0 days	1 Mar '11	1 Mar '11	
3			1.2	Preliminaries	130 days	1 Mar '11	30 Aug '11	
4			1.2.1	Performance Bond & Insurance	3 days	1 Mar '11	3 Mar '11	2
5			1.2.2	Establish & Removal Site Office	127 days	6 Mar '11	30 Aug '11	
6			1.2.2.1	Establish Site Office	3 days	6 Mar '11	8 Mar '11	4
7			1.2.2.2	Removal Site Office	2 days	29 Aug '11	30 Aug '11	20FF,25FF,28
8			1.2.3	Maintenance of Site Office	126 days	6 Mar '11	29 Aug '11	6SS
9			1.2.4	Laporan Kemajuan	87 days	27 Mar '11	26 Jul '11	
15			1.3	Land Acquisition (Blok A & B)	0 days	1 Mar '11	1 Mar '11	2
16			1.4	Services Relocation (Blok B only)	0 days	1 Mar '11	1 Mar '11	15
17			1.5	Blok A	117 days	6 Mar '11	16 Aug '11	
18			1.5.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,15
19			1.5.2	Kerja Structure	37 days	1 May '11	21 Jun '11	18FS-15 day:
20			1.5.3	Kerja Arkitek	50 days	8 Jun '11	16 Aug '11	19FS-10 day:
21			1.5.4	Kerja M&E	35 days	22 Jun '11	9 Aug '11	19
22			1.6	Blok B	120 days	6 Mar '11	21 Aug '11	
23			1.6.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,16
24			1.6.2	Kerja Structure	35 days	24 Apr '11	12 Jun '11	23SS+35 day
25			1.6.3	Kerja Arkitek	60 days	30 May '11	21 Aug '11	24FS-10 day:
26			1.6.4	Kerja M & E	50 days	13 Jun '11	21 Aug '11	24
27			1.7	Completion of Cable Laying By TN	0 days	28 Aug '11	28 Aug '11	21FS+5 days
28			1.8	Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27
29			1.9	Projek Siap	0 days	30 Aug '11	30 Aug '11	3,17,22,28

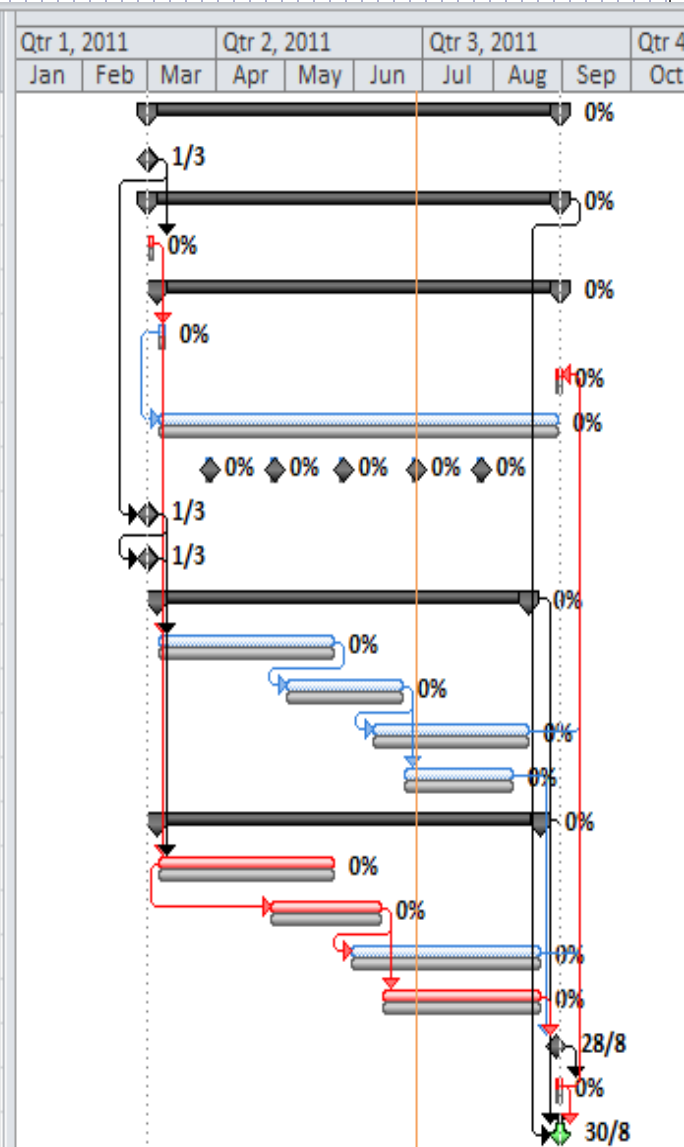

MICROSOFT PROJECT



PEMANTAUAN KERJA PROJEK - Menentukan Status Kemajuan Projek

Menentukan Tarikh Kedudukan atau Garisan Tracking

File Task Resource Project View Format

Subproject Project Information Custom Fields Links Between Projects WBS Change Working Time Calculate Project Set Baseline Move Project Status Date: 28/6/11 Update Project Sync to Protected Actuals Visual Reports Reports Compare Projects Spelling Proofing

Task Mod	WBS	Task Name	Duration	Start	Finish	Predecessors	Qtr 1, 2011	Qtr 2, 2011	Qtr 3, 2011	Qtr 4, 2011
1	1	Projek JKR - Membina 2 blok bangunan								
2	1.1	Projek Mula								
3	1.2	Preliminaries								
4	1.2.1	Performance Bond & Insurance								
5	1.2.2	Establish & Removal Site Office								
6	1.2.2.1	Establish Site Office								
7	1.2.2.2	Removal Site Office								
8	1.2.3	Maintenance of Site Office								
9	1.2.4	Laporan Kemajuan								
15	1.3	Land Acquisition (Blok A & B)								
16	1.4	Services Relocation (Blok B only)								
17	1.5	Blok A								
18	1.5.1	Kerja Tanah								
19	1.5.2	Kerja Structure								
20	1.5.3	Kerja Arkitek								
21	1.5.4	Kerja M&E								
22	1.6	Blok B								
23	1.6.1	Kerja Tanah								
24	1.6.2	Kerja Structure								
25	1.6.3	Kerja Arkitek								
26	1.6.4	Kerja M & E								
27	1.7	Completion of Cable Laying By T								
28	1.8	Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27				
29	1.9	Projek Siap	0 days	30 Aug '11	30 Aug '11	3,17,22,28				

Project Information for 'Projek JKR 010311 rev0 baselin1'

Start date: 1 Mar '11 Current date: 28 Jun '11

Finish date: 30 Aug '11 Status date: 28 Jun '11

Schedule from: Project Start Date Calendar: Stan

All tasks begin as soon as possible. Priority: 500

Enterprise Custom Fields

Department:

Custom Field Name

Help Statistics... OK Cancel

June, 2011

Su	Mo	Tu	We	Th	Fr	Sa
29	30	31	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	1	2
3	4	5	6	7	8	9

Today

9

0% 30/8

Menentukan Tarikh Kedudukan atau Garisan Tracking

Gridlines...

Line to change:

- Bottom Tier Column
- Current Date
- Sheet Rows
- Sheet Columns
- Title Vertical
- Title Horizontal
- Page Breaks
- Project Start
- Project Finish
- Status Date**
- Top Tier Column

Normal

Type: Color:

At interval

☐ None ☐ 2 ☐ 3 ☐ 4 ☐ Other:


Type: Color:

Help OK Cancel

Task Name	Duration	Start	Finish	Predecessors
1 Projek JKR - Membina 2 blok bangunan	130 days	1 Mar '11	30 Aug '11	
2 1.1				
3 1.2				
4 1.2.1				
5 1.2.2				
6 1.2.2.1				
7 1.2.2.2				
8 1.2.3				
9 1.2.4				
15 1.3				
16 1.4				
17 1.5				
18 1.5.1				
19 1.5.2				
20 1.5.3				
21 1.5.4				
22 1.6 Blok B	120 days	6 Mar '11	21 Aug '11	
23 1.6.1 Kerja Tanah	55 days	6 Mar '11	22 May '11	4,16
24 1.6.2 Kerja Structure	35 days	24 Apr '11	12 Jun '11	23SS+35 day
25 1.6.3 Kerja Arkitek	60 days	30 May '11	21 Aug '11	24FS-10 day:
26 1.6.4 Kerja M & E	50 days	13 Jun '11	21 Aug '11	24
27 1.7 Completion of Cable Laying By TM	0 days	28 Aug '11	28 Aug '11	21FS+5 days
28 1.8 Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27
29 1.9 Projek Siap	0 days	30 Aug '11	30 Aug '11	3,17,22,28

Menentukan Tarikh Kedudukan atau Garisan Tracking

		Task Mod	WBS	Task Name	Duration	Start	Finish	Predecess
1			1	Projek JKR - Membina 2 blok bangunan	130 days	1 Mar '11	30 Aug '11	
2			1.1	Projek Mula	0 days	1 Mar '11	1 Mar '11	
3			1.2	Preliminaries	130 days	1 Mar '11	30 Aug '11	
4			1.2.1	Performance Bond & Insurance	3 days	1 Mar '11	3 Mar '11	2
5			1.2.2	Establish & Removal Site Office	127 days	6 Mar '11	30 Aug '11	
6			1.2.2.1	Establish Site Office	3 days	6 Mar '11	8 Mar '11	4
7			1.2.2.2	Removal Site Office	2 days	29 Aug '11	30 Aug '11	20FF,25FF,28
8			1.2.3	Maintenance of Site Office	126 days	6 Mar '11	29 Aug '11	6SS
9			1.2.4	Laporan Kemajuan	87 days	27 Mar '11	26 Jul '11	
15			1.3	Land Acquisition (Blok A & B)	0 days	1 Mar '11	1 Mar '11	2
16			1.4	Services Relocation (Blok B only)	0 days	1 Mar '11	1 Mar '11	15
17			1.5	Blok A	117 days	6 Mar '11	16 Aug '11	
18			1.5.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,15
19			1.5.2	Kerja Structure	37 days	1 May '11	21 Jun '11	18FS-15 day:
20			1.5.3	Kerja Arkitek	50 days	8 Jun '11	16 Aug '11	19FS-10 day:
21			1.5.4	Kerja M&E	35 days	22 Jun '11	9 Aug '11	19
22			1.6	Blok B	120 days	6 Mar '11	21 Aug '11	
23			1.6.1	Kerja Tanah	55 days	6 Mar '11	22 May '11	4,16
24			1.6.2	Kerja Structure	35 days	24 Apr '11	12 Jun '11	23SS+35 day
25			1.6.3	Kerja Arkitek	60 days	30 May '11	21 Aug '11	24FS-10 day:
26			1.6.4	Kerja M & E	50 days	13 Jun '11	21 Aug '11	24
27			1.7	Completion of Cable Laying By TN	0 days	28 Aug '11	28 Aug '11	21FS+5 days
28			1.8	Testing & Commissioning	2 days	29 Aug '11	30 Aug '11	27
29			1.9	Projek Siap	0 days	30 Aug '11	30 Aug '11	3,17,22,28

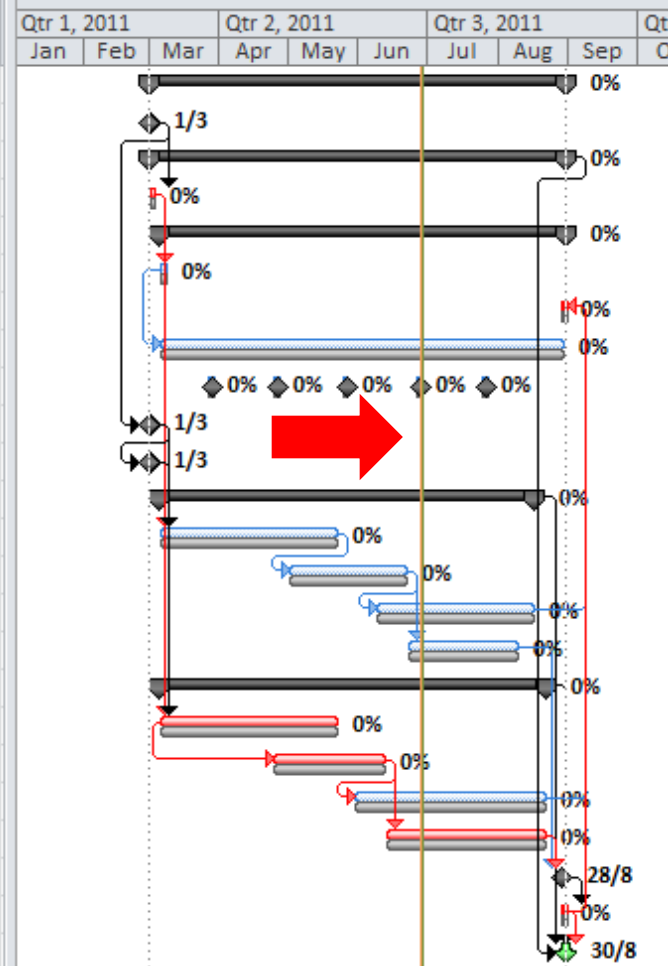



PEMANTAUAN KERJA PROJEK **- Pengesanan Kemajuan** **Jadual vs sebenar projek**

Proses- Proses Pengesanan Kemajuan



Analisa Kemajuan Projek



Baseline :	Status Date	Schd. Progress	Actual Progress	Variance	Actions
Financial Progress					
Physical Progress					
Project Finish Date					

Introduction

The screenshot displays the Primavera P6 software interface. The 'Format' menu is open, showing options for 'Cost', 'Entry', 'Hyperlink', 'Schedule', 'Tracking' (which is selected with a checkmark), 'Variance', 'Work', 'Summary', and 'Usage'. Below these are options to 'Reset to Default', 'Save Fields as a New Table', and 'More Tables...'. The background shows a Gantt chart view of a project schedule, with tasks listed on the left and their duration bars on the right. The tasks include 'Projek JKR - Membina', 'Projek Mula', 'Preliminaries', 'Performance', 'Establish & Re', 'Establish!', 'Removal S', 'Maintenance', 'Laporan Kema', 'Land Acquisitor', 'Services Relocat', 'Blok A', 'Kerja Tanah', 'Kerja Structur', 'Kerja Arkitek', 'Kerja M&E', 'Blok B', 'Kerja Tanah', 'Kerja Structur', 'Kerja Arkitek', 'Kerja M & E', 'Completion of C', 'Testing & Comm', and 'Projek Siap'. The Gantt chart shows the timeline for these tasks, with a vertical line indicating the current date.

Status Kemajuan Mengikut Jadual


The screenshot displays the Microsoft Project interface. The 'Update Project' dialog box is open, showing the following options:

- ☒ Update work as complete through: 28 Jun '11
 - ☒ Set 0% - 100% complete
 - ☐ Set 0% or 100% complete only
- ☐ Reschedule uncompleted work to start after: 28 Jun '11
- For: ☒ Entire project ☐ Selected tasks

The background shows a Gantt chart with task bars and a task list table. The task list table has the following columns: Task Name, Act. Start, Act. Finish, % Comp., Phys. %, Act. Dur., Rem. Dur., and Act. Cost. The tasks listed include 'Projek JKR - Membin', 'Projek Mula', 'Preliminaries', 'Performance', 'Establish & Re', 'Establish !', 'Removal S', 'Maintenance', 'Laporan Kema', 'Land Acquisitor', 'Services Relocat', 'Blok A', 'Kerja Tanah', 'Kerja Struktur', 'Kerja Arkitek', 'Kerja M&E', 'Blok B', 'Kerja Tanah', 'Kerja Struktur', 'Kerja Arkitek', 'Kerja M & E', 'Completion of Ci', 'Testing & Comm', and 'Projek Siap'.

Status Kemajuan Mengikut Jadual

	Task Name	Act. Start	Act. Finish	% Comp.	Phys. %	Act. Dur.	Rem. Dur.	Act. Cost	Qtr 1, 2011			Qtr 2, 2011			Qtr 3, 2011			Qtr 4, 2011
									Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	
1	Projek JKR - Membina	1 Mar '11	NA	63%	0%	82.52 days	47.48 days	1,339,950.00										63%
2	Projek Mula	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00										
3	Preliminaries	1 Mar '11	NA	67%	0%	86.67 days	43.33 days	RM37,750.00										67%
4	Performance	1 Mar '11	3 Mar '11	100%	0%	3 days	0 days	RM10,000.00										100%
5	Establish & Re	6 Mar '11	NA	60%	0%	76.2 days	50.8 days	RM14,000.00										60%
6	Establish	6 Mar '11	8 Mar '11	100%	0%	3 days	0 days	RM14,000.00										100%
7	Removal S	NA	NA	0%	0%	0 days	2 days	RM0.00										0%
8	Maintenance	6 Mar '11	NA	65%	0%	82 days	44 days	RM9,750.00										65%
9	Laporan Kema	27 Mar '11	NA	80%	0%	69.6 days	17.4 days	RM4,000.00										80%
15	Land Acquisitor	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00										100%
16	Services Relocat	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00										100%
17	Blok A	6 Mar '11	NA	63%	0%	74.03 days	42.97 days	M703,000.00										63%
18	Kerja Tanah	6 Mar '11	22 May '11	100%	0%	55 days	0 days	M200,000.00										100%
19	Kerja Structur	1 May '11	21 Jun '11	100%	0%	37 days	0 days	M400,000.00										100%
20	Kerja Arkitek	8 Jun '11	NA	30%	0%	15 days	35 days	RM75,000.00										30%
21	Kerja M&E	22 Jun '11	NA	14%	0%	5 days	30 days	RM28,000.00										14%
22	Blok B	6 Mar '11	NA	62%	0%	74.4 days	45.6 days	M599,200.00										62%
23	Kerja Tanah	6 Mar '11	22 May '11	100%	0%	55 days	0 days	M180,000.00										100%
24	Kerja Structur	24 Apr '11	12 Jun '11	100%	0%	35 days	0 days	M290,000.00										100%
25	Kerja Arkitek	30 May '11	NA	37%	0%	22 days	38 days	RM74,000.00										37%
26	Kerja M & E	13 Jun '11	NA	24%	0%	12 days	38 days	RM55,200.00										24%
27	Completion of C	NA	NA	0%	0%	0 days	0 days	RM0.00										0%
28	Testing & Comm	NA	NA	0%	0%	0 days	2 days	RM0.00										0%
29	Projek Siap	NA	NA	0%	0%	0 days	0 days	RM0.00										0%

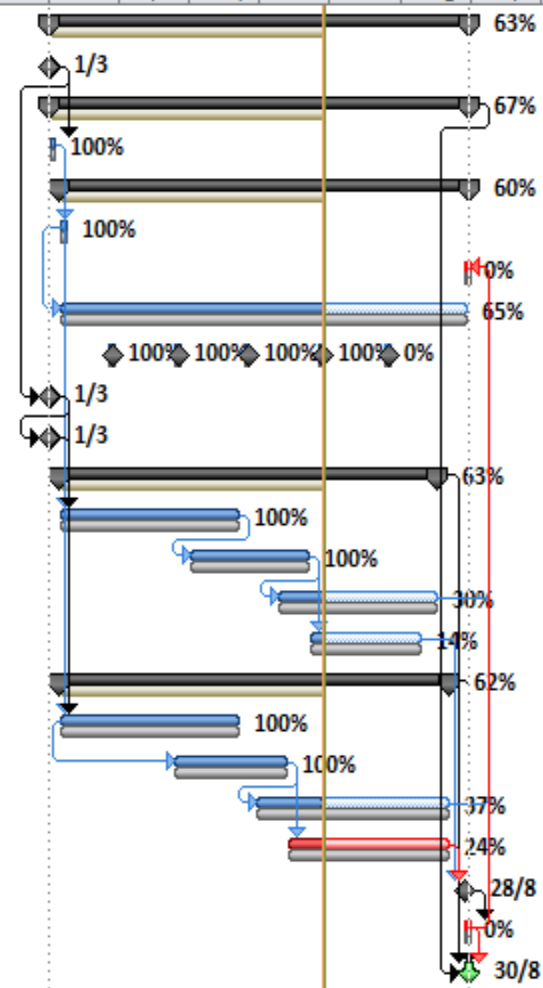


MICROSOFT PROJECT




PEMANTAUAN KERJA PROJEK - Mengenalpasti Variance

Monitor and Control

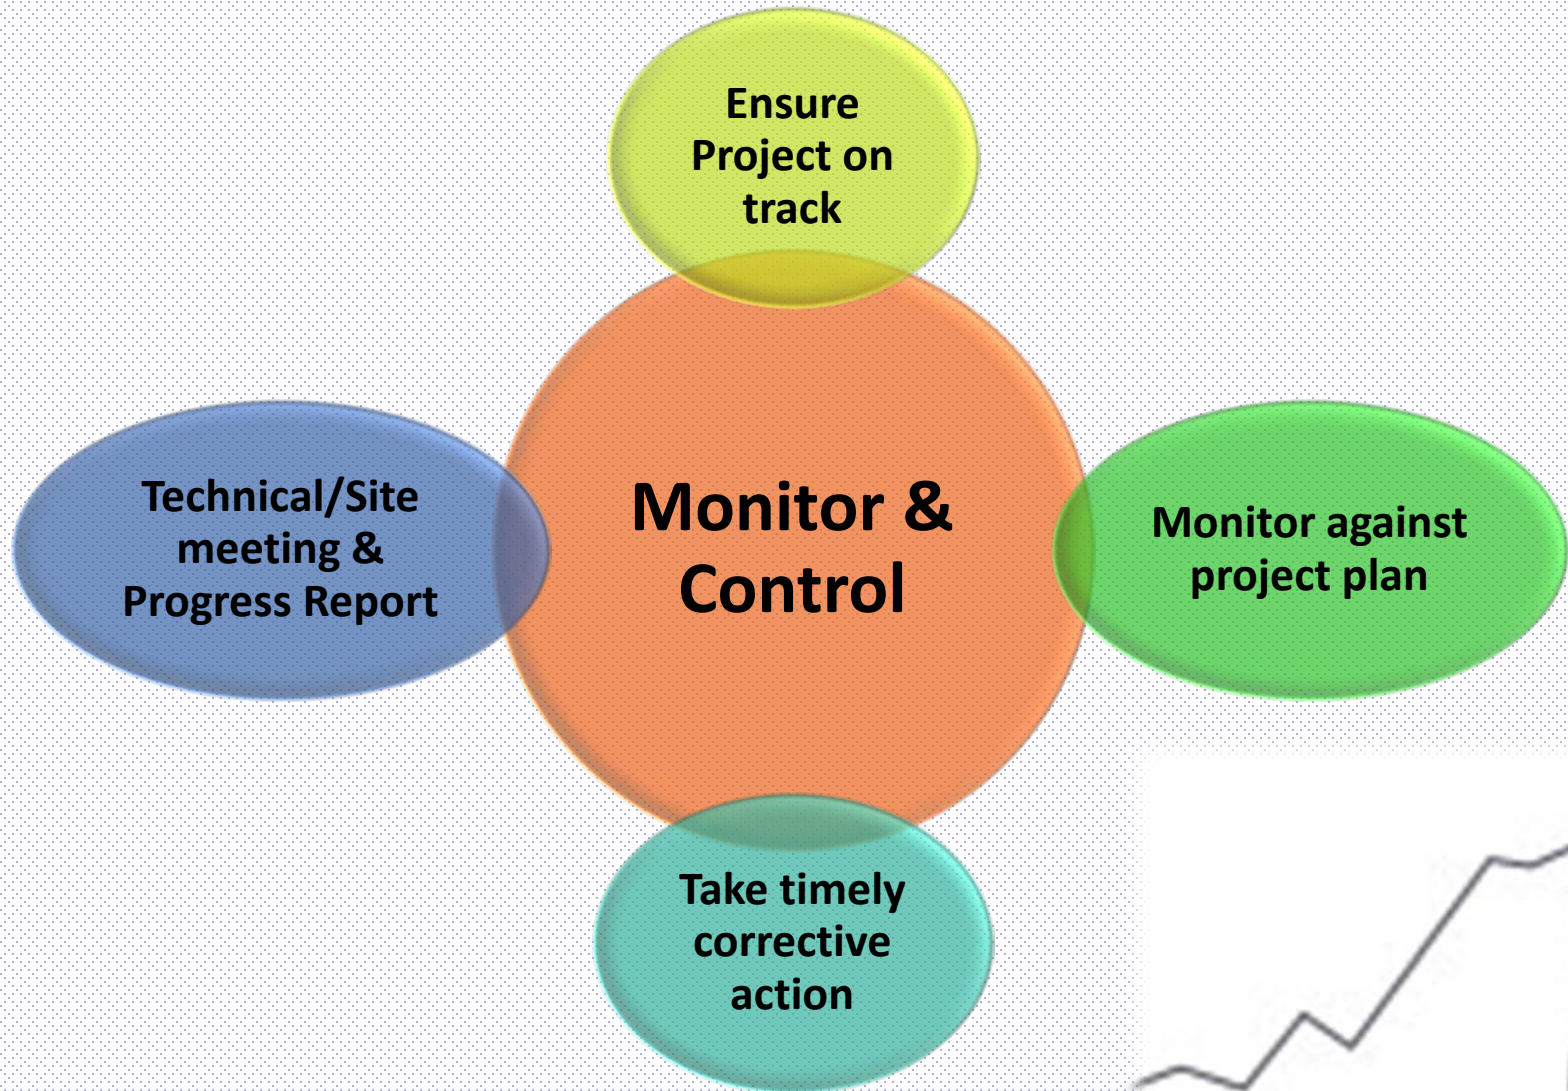

Menilai Kemajuan Sebenar di Tapak

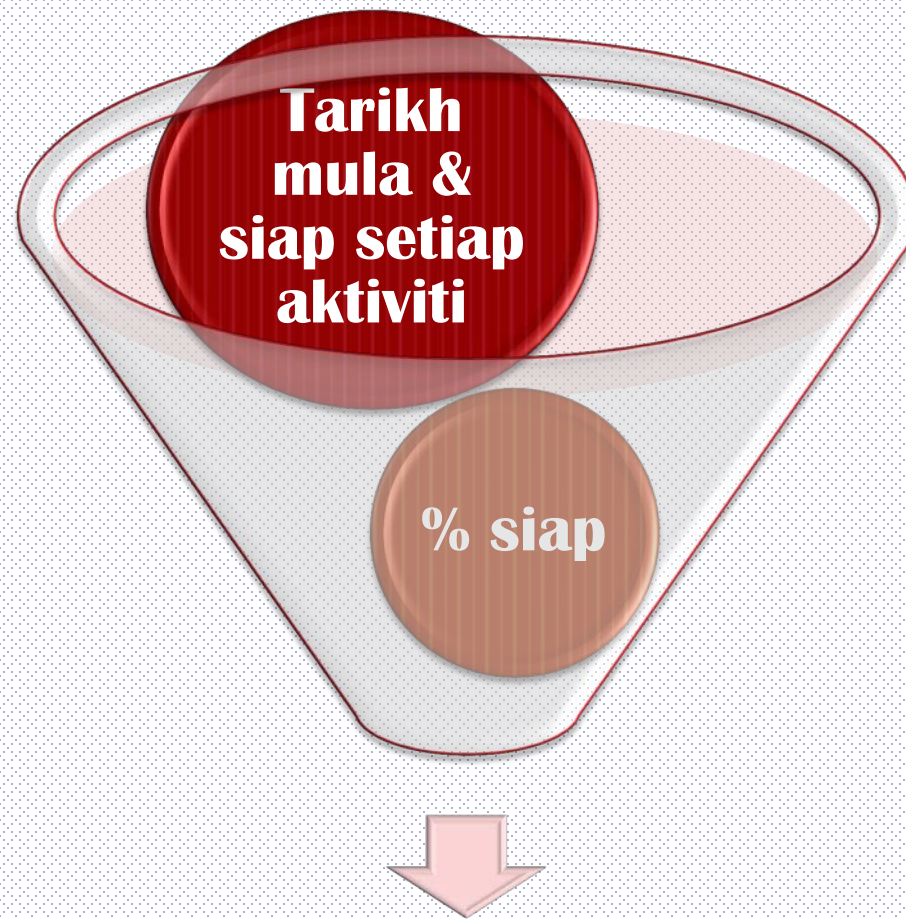


Yang Perlu disemak

Contoh : Mengesan Kemajuan Kerja di Tapak

No	Activity	Actual Start	Actual Finish	% Complete (pada tarikh tracking @ status date)
	Blok A			
1	Kerja Tanah	14/6	7/9	100
2	Kerja Struktur	10/8		80
3	Kerja Arkitek	14/9		20
4	Kerja M&E	24/9		5
	Blok B			
5	Kerja Tanah	20/6	14/9	100
6	Kerja Struktur	9/8		60
7	Kerja Arkitek	15/9		20
8	Kerja M&E			

Kemajuan Sebenar Fizikal & Kewangan

	Task Name	Act. Start	Act. Finish	% Comp	Phys. %	Act. Dur.	Rem. Dur.	Act. Cost
1	Projek JKR - Membin	1 Mar '11	NA	55%	0%	76.62 days	63.38 days	1,011,750.00
2	Projek Mula	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00
3	Preliminaries	1 Mar '11	NA	67%	0%	93.33 days	46.67 days	RM37,750.00
4	Performance	1 Mar '11	3 Mar '11	100%	0%	3 days	0 days	RM10,000.00
5	Establish & Re	6 Mar '11	NA	60%	0%	82.2 days	54.8 days	RM14,000.00
6	Establish	6 Mar '11	8 Mar '11	100%	0%	3 days	0 days	RM14,000.00
7	Removal S	NA	NA	0%	0%	0 days	2 days	RM0.00
8	Maintenance	6 Mar '11	NA	65%	0%	82 days	44 days	RM9,750.00
9	Laporan Kema	27 Mar '11	NA	80%	0%	69.6 days	17.4 days	RM4,000.00
15	Land Acquisitio	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00
16	Services Relocat	1 Mar '11	1 Mar '11	100%	0%	0 days	0 days	RM0.00
17	Blok A	14 Mar '11	NA	56%	0%	64.32 days	50.68 days	M580,000.00
18	Kerja Tanah	14 Mar '11	7 Jun '11	100%	0%	61 days	0 days	M200,000.00
19	Kerja Structur	10 May '11	NA	80%	0%	29.6 days	7.4 days	M320,000.00
20	Kerja Arkitek	14 Jun '11	NA	20%	0%	10 days	40 days	RM50,000.00
21	Kerja M&E	24 Jun '11	NA	5%	0%	1.75 days	33.25 days	RM10,000.00
22	Blok B	20 Mar '11	NA	46%	0%	55.99 days	66.01 days	M394,000.00
23	Kerja Tanah	20 Mar '11	14 Jun '11	100%	0%	62 days	0 days	M180,000.00
24	Kerja Structur	9 May '11	NA	60%	0%	21 days	14 days	M174,000.00
25	Kerja Arkitek	15 Jun '11	NA	20%	0%	12 days	48 days	RM40,000.00
26	Kerja M & E	NA	NA	0%	0%	0 days	50 days	RM0.00
27	Completion of Ci	NA	NA	0%	0%	0 days	0 days	RM0.00
28	Testing & Comm	NA	NA	0%	0%	0 days	2 days	RM0.00
29	Projek Siap	NA	NA	0%	0%	0 days	0 days	RM0.00

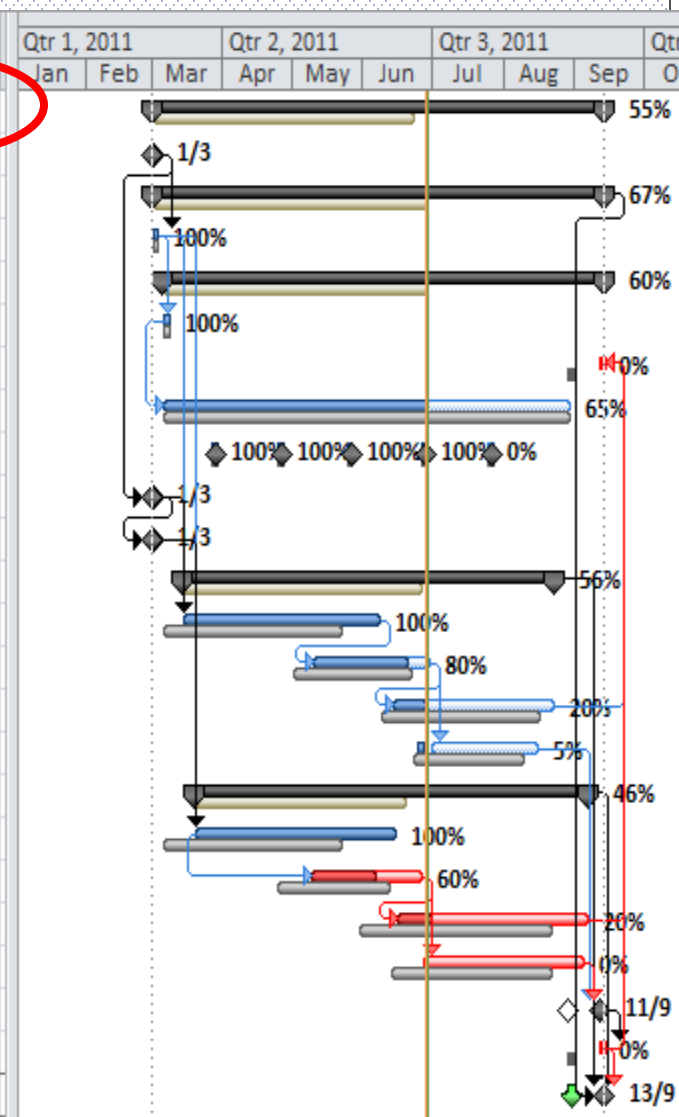

Contoh : Variance Kemajuan Fizikal


Laporan Kemajuan								
Task Name	Act. Start	Act. Finish	% Comp.	Phys. % Comp.	Act. Dur.	Rem. Dur.	Act. Cost	Act.
- Projek Membina 2 Blo	1 Aug '10	NA	48%	0%	49.9 days	54.1 days	RM881,950.00	3,1
Projek Mula	1 Aug '10	1 Aug '10	100%	0%	0 days	0 days	RM0.00	
- Preliminaries	1 Aug '10	NA	55%	0%	56.89 days	47.11 days	RM34,950.00	
Performance Bor	1 Aug '10	5 Aug '10	100%	0%	5 days	0 days	RM10,000.00	
- Establish & Ren	8 Aug '10	NA	75%	0%	74.25 days	24.75 days	RM15,000.00	
Establish Site	8 Aug '10	10 Aug '10	100%	0%	3 days	0 days	RM15,000.00	
Removal Site	NA	NA	0%	0%	0 days	1 day	RM0.00	
Maintenance of S	8 Aug '10	NA	53%	0%	52 days	46 days	RM7,950.00	
+ Laporan Kemaji	25 Aug '10	NA	40%	0%	33.2 days	49.8 days	RM2,000.00	

Laporan Kemajuan								
Task Name	Act. Start	Act. Finish	% Comp.	Phys. % Comp.	Act. Dur.	Rem. Dur.	Act. Cost	Act.
- Blok A								
- Projek Membina 2 Blo	1 Aug '10	NA	41%	0%	45.13 days	65.87 days	RM652,950.00	2,31C
Projek Mula	1 Aug '10	1 Aug '10	100%	0%	0 days	0 days	RM0.00	
- Preliminaries	1 Aug '10	NA	55%	0%	60.72 days	50.28 days	RM34,950.00	
Performance Bor	1 Aug '10	5 Aug '10	100%	0%	5 days	0 days	RM10,000.00	
- Establish & Ren	8 Aug '10	NA	75%	0%	79.5 days	26.5 days	RM15,000.00	
Establish Site	8 Aug '10	10 Aug '10	100%	0%	3 days	0 days	RM15,000.00	
Removal Site	NA	NA	0%	0%	0 days	1 day	RM0.00	
Maintenance of S	8 Aug '10	NA	53%	0%	52 days	46 days	RM7,950.00	
+ Laporan Kemaji	25 Aug '10	NA	40%	0%	33.2 days	49.8 days	RM2,000.00	
Land Acquisition	1 Aug '10	1 Aug '10	100%	0%	0 days	0 days	RM0.00	
Services Relocator	1 Aug '10	1 Aug '10	100%	0%	0 days	0 days	RM0.00	
- Blok B								
- Blok A	15 Aug '10	NA	40%	0%	36.96 days	55.18 days	RM405,000.00	1,08E
Kerja Tanah	15 Aug '10	15 Oct '10	100%	0%	42 days	0 days	RM200,000.00	

Jadual = **48%**

Sebenar = **41%**

Variance = **?**

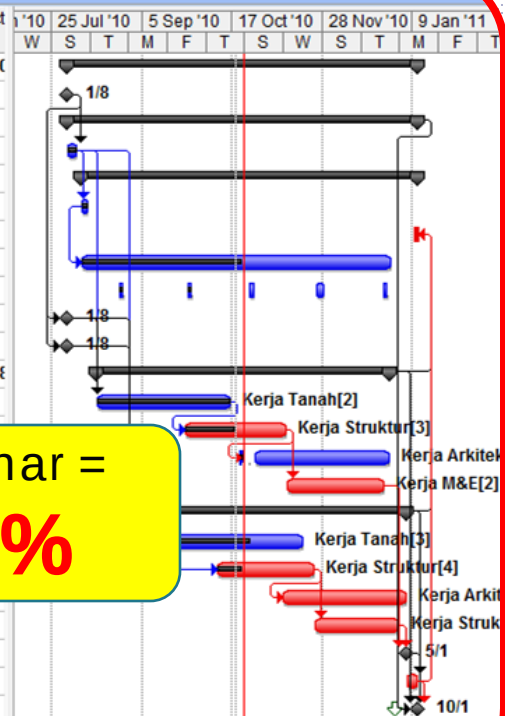



Summary :

Mengenalpasti Variance

No	Keterangan	Jadual	Sebenar	<i>Variance</i>
1	Kemajuan Fizikal			
2	Kemajuan Kewangan			
3	Tarikh Siap			



THANK YOU