ONDUVILLA® A GREAT DESIGN




Beauty meets function with ONDUVILLA®, a high quality lightweight roofing solution with Mediterranean-style aesthetics. Onduvilla® offers top-notch acoustic and thermal comfort while adding a distinctive beauty with its 3D colour shades and clay tile resemblance. Crown your designs with the best; go with ONDUVILLA®.

A LARGE CHOICE OF COLOURS & SHADES



IMPROVED 3D EFFECT

Horizontal shadows are cleverly painted on to give the thick, distinctive, raised appearance of traditional Mediterranean roofs.



SPECIFICATIONS	
Length	1060mm
Width	400mm
Tiles per m² .	3.23pcs
Thickness	3mm
Weight per Tile	1.27kg
Weight per m²	4kg
Wave Height	40mm
Surface Covered per Tile	0.31m²
Colour	Shaded Red, Classic Red,
	Shaded Green, Forest Green,
	Shaded Brown, Terracotta, Black

"MORE THAN 100 COUNTRIES ACROSS THE GLOBE"



Sales offices

Importers/distributors

Production plants

For supply and installation, please contact us:

Onduline Building Materials (M) Sdn. Bhd.

A-3A-2 Sunway Giza Mall, No 2, Jalan PJU 5/14, PJU 5, Kota Damansara,

47810, Petaling Jaya, Selangor, Malaysia.

Telephone: +603 6732 3188 Fax: +603 6150 5288

Email: info@onduline.com.my

Factory Address

2715, Mukim 1, Tingkat Perusahaan Enam, Kawasan Perusahaan Perai, 13600 Perai, Pulau Pinang, Malaysia.

Authorized Dealer














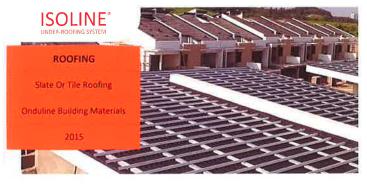

ROOFING SOLUTIONS DESIGNED FOR YOU





ONDULINE® LIGHTWEIGHT ROOFING SOLUTIONS

ONDULINE® is an extremely tough lightweight corrugated roo. and well-cladding material manufactured from bitumen saturated with cellulose fibres under intense pressure and heat.



TECHNOLOGY



RESISTANT

HIGH WIND



RESPONSIBLE

LIGHTWEIGHT





ACOUSTIC-**FRIENDLY**



SIMPLE



EASY TO TRANSPORT









BROWN

BLACK

GREEN

RED

SPECIFICATIONS

SI ECII ICATIONS	
Length	2000mm
Width	950mm
Area per Sheet	1 9m²
Thickness	3mm
Weight per Sheet	6.5kg
Weight per m ²	3 42kg
Corrugation Height	38mm
Corrugation Width	95mm
Number of Corrugation per Sheet	10
Colour	Black Brown Red and Gr

ECO RESPONSIBILITY

You can count on total regulatory compliance with building codes. And when it comes to meeting high standards, ONDULINE® solutions work just as hard for the environment.

- ONDULINE® has achieved a low carbon footprint and recycles some 200,000 tons of material each year.
- Natural pigments are used for colouration.
- Products contain no traces of asbestos.
- Materials composed of recycled fibres, verified by a third party (ICC ES), whose certificates can help for LEED.
- Ecological lifecycle performance.










ONDULINE® ROOFING ACCESSORIES



RENOVATION & REPAIR

Best solution to leakage, re-roofing & repair of OLD roofs.




ISOLINE® UNDER-ROOFING SYSTEM



ISOLINE® L

SPECIFICATIONS

Length	2000mm
Width	950mm
Thickness	3mm +/-
Weight	3.42kg/sqm
Corrugation Depth	38mm +/-
Pitch of Corrugation	95mm +/-
No. of Corrugation	10
Min pitch	5°







Developed by the world leader in composite roofing sheets, with powerful global presence in more than 100 countries, ONDULINE® solutions are ISO 9001- certified and complies with the strictest standards and regulations.

























